

CORRECTED VERSION

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
11 November 2004 (11.11.2004)


PCT

(10) International Publication Number
WO 2004/096498 A1

- | | | |
|---|--|---|
| (51) International Patent Classification ⁷ : | B25B 23/04, | (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW. |
| (21) International Application Number: | PCT/GB2004/001889 | |
| (22) International Filing Date: | 30 April 2004 (30.04.2004) | |
| (25) Filing Language: | English | |
| (26) Publication Language: | English | |
| (30) Priority Data: | | |
| 0309787.0 | 30 April 2003 (30.04.2003) | GB |
| (71) Applicant (for all designated States except US): | BLACK & DECKER INC [US/US]; 1207 Drummond Plaza, Newark, DE 19711 (US). | |
| (72) Inventors; and | | |
| (75) Inventors/Applicants (for US only): | BONE, Daniel [GB/GB]; 5 Black Road, Langley Moor, Durham DH7 8LW (GB). THOMPSON, Phillip, Kelvin [GB/GB]; 1 Lumley Close, Spennymoor, Co Durham DL16 6LS (GB). | |
| (74) Agents: | CAVALIER, Marcus, Alexander, Mawson et al.; Black & Decker, 210 Bath Road, Slough SL1 3YD (GB). | |



(54) Title: SCREW FEEDER

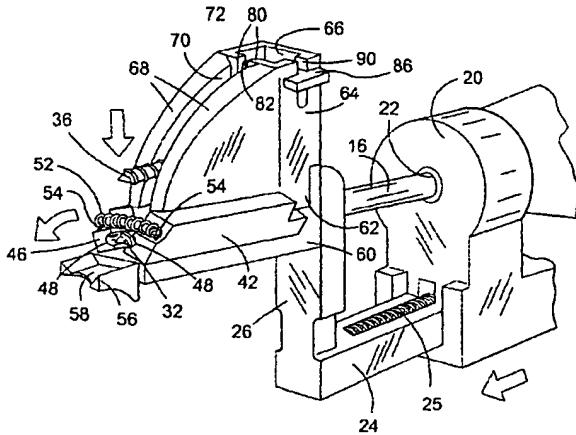

WO 2004/096498 A1

(57) Abstract: A screw feeder (10) is disclosed which can be mounted to a screwdriver (12) for holding a screw (32) in position relative to a screwdriver bit (16) of the screwdriver (12) to enable insertion of the screw (12) into a workpiece adjacent the holding portion (30). The screw feeder (10) has a holding portion (30) and a feeder portion (34) adjacent the holding portion (30). The holding portion (30) can releasably hold a first screw (32) in position relative to the screwdriver bit (16) and receive a distal end of the screwdriver bit (16) to enable the screwdriver bit (16) to insert the first screw (32) into the workpiece. The feeder portion (34) is arranged adjacent the holding portion (30) and is adapted to receive a plurality of second screws (36) and to sequentially feed each of the second screws (36) into the holding portion (30) in response to retraction of the screwdriver bit (16) from the holding portion.

[Continued on next page]



EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS,
JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM,
PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM,
ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA,
SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ,
BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE,
IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE,
SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation US
- of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report
- with amended claims

(48) Date of publication of this corrected version:

20 January 2005

(15) Information about Correction:

see PCT Gazette No. 03/2005 of 20 January 2005, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.